## DATA SHEET

## BT900D (R)





## **Superior Security**

*Slimline style, engineered for tough environments* 


	General Specifications		
	Power Requirement	- VDC regulated	12 VDC
l	Current Consumption	- Average	157ma
		- Peak	174ma
	Card Read Range	- Metric	20mm - 40 mm
		- USA	0.8"- 1.6"
	Operating Temperature	- Metric	-25°C to +65°C
		- USA	-13°F to +149°F
	Relative Humidity	- % max	90%, operating non condensing
	Reader Dimensions	- Metric	140mm (L) x 45mm (W) x 42mm (D)
		- USA	5.51" (L) x 1.77" (W) x 1.26" (D)
1	Status LED's	- Colour	Green & Red (Ext. cont. to Green)
	Audible Tone		Internal & external buzzer control
	Colour finish		Charcoal
	Certifications		FCC, CE, C-tick
	IP Rating		IP65
	ROHS		Compliant

General Specifications

The BT900D reader is stylish as well as functional with its low profile and slimline shape, allowing easy installation on door architraves or mullions where larger readers will not fit. It can be mounted directly on a metal door frame with no adverse effect to the reader's function. A universal back plate is also available for mounting on most international standard gangboxes.

Available in several models, the BT900D caters for all security requirements large or small and offers a solution for all applications whether driven by budget or functionality.

The readers are available as low cost, refurbished units and carry 6 month warranty.

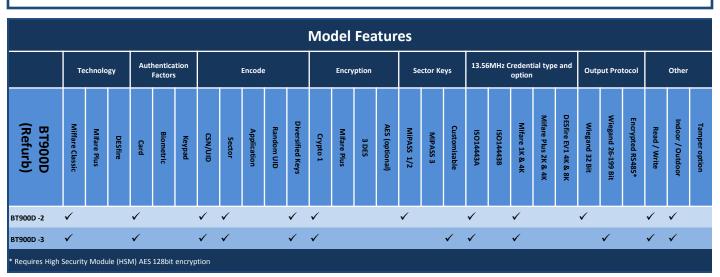

Contact BQT Solutions for more information or a discussion on custom options available, visit our website <u>www.bqtsolutions.com</u> for your nearest office. [JUL2013] All specifications are subject to change without notice. Contact BQT Solutions to confirm. BQT Solution and miPASS are registered trademarks. ©2013.