
BT835 (UK Style)



RFID READER DATASHEET 23.06.21

PRODUCT

The BT835 is a flush MIFARE® smart card reader to suit a standard UK gang box. They can be purchased preconfigured or customised to suit any requirement and are able to integrate seamlessly with existing systems and facilitate migrating to higher security technology.



MODEL FEATURES

		BT835-1	BT835-2	BT835-3	BT835-4	BT835-5	BT835-6
Technology	125kHz						
	MIFARE Classic®						
	MIFARE Plus®						
	MIFARE® DESFire®						
Factors	Card						
	Keypad						
	Biometric						
Encryption	CSN/UID						
	Crypto1						
	3DES						
	AES						
Keys	Diversified Key						
	Custom Key						
Output	Wiegand 32-bit						
	Wiegand 26-bit to 199-bit						
	Encrypted RS485						

SPECIFICATIONS

- Voltage at Reader 8VDC to 16VDC
- Current Usage Average: 60mA Peak: 160mA
- Card Read Range 20mm to 40mm (0.8" to 1.6")
- Operating Temperature
 -25°C to +65°C (-13°F to +149°F)
- Relative Humidity (% max) 90%, operating non condensing
- Materials
 Reader Plate: 6mm Acrylic
 Colour Finish: Black
- Feedback
 Green/Red LED, with external
 control
 Buzzer, with external control
 Tamper detection, optional
 output

Credential Options

ISO14443A, MIFARE Classic® 1K/4K, MIFARE Plus® X 2K/4K, MIFARE® DESFire® EV1 4K/8K, MIFARE® DESFire® EV2 4K/8K, MIFARE® DESFire® EV3 4K/8K

- Compliance and Certification FCC, CE, UKCA, RCM, RoHS, IP65
- **Reader Variants**


DESFire Reader

BT835-1 - CSN Reader BT835-2 - miPASS2 Reader BT835-3 - Custom MIFARE Classic Reader BT835-4 - miPASS3 Reader BT835-5 - miPASS4 Reader

BT835-6 - Custom MIFARE

DIAGRAM

DIAGRAMS ARE NOT TO SCALE. MEASUREMENTS ARE IN MILLIMETERS (MM).

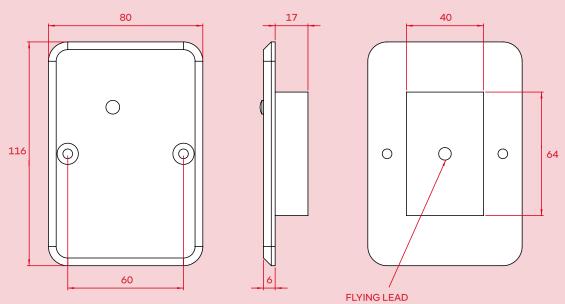



CONTACT SALES@BQTSOLUTIONS.COM TO BE PUT IN TOUCH WITH YOUR LOCAL REPRESENTATIVE.

WWW.BQTSOLUTIONS.COM