


YC10

SAFETY LOCK DATASHEET

23.06.21

PRODUCT

A fully concealed cabinet locking system for securing documents in drawers or keeping children safe from kitchen cabinetry. Offered in plug-and-play kits for cost effective safety.

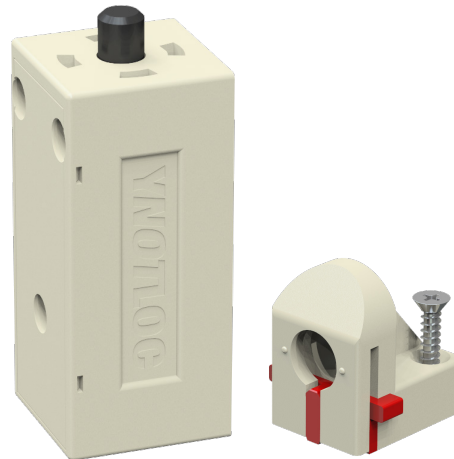

FEATURES


- **Simple Installation**
A patented installation aid ensures fitting the lock is a quick and easy process. Wiring couldn't be easier with 'plug and play' connections, and the locks can be daisy-chained together to help simplify installation even further.
- **Concealed Security**
All the lock components are hidden inside the cabinetry ensuring a clean look as well as offering a further level of security.
- **Modular System**
The YC10 come in a pre-made packs to offer a one box solution. Systems can be expanded by simply adding more packs to suit any requirements.
- **Convenient Control**
The magnet wand can trigger a lock to disengage when in proximity of it's sensor. The built-in slider on the strike allows the overriding of the lock and free access to the cupboard or drawer.
- **Complete Safety**
The YC10 are fail secure locks to guarantee that closed cabinets or drawers are always secured, even if power failure occurs.

SPECIFICATIONS

- **Door Gap**
2.5mm (installation aid included)
- **Static Strength**
600 newtons (60Kg)
- **Endurance**
Cycle tested to 1,000,000 operations
- **Bolt Pin**
ø8mm, 8mm extension
- **Voltage at Lock**
12VDC ±10%
- **Current Usage**
Locked: 0mA
Unlocked: 250mA
- **Materials**
Lock / Strike Body: ABS Plastic
Bolt Pin: Steel
- **Compliance and Certification**
C-Tick, Various Patents
- **Lock Variants**
YNL502A – 2 Lock Starter Pack with Magnet Wand, 2 Sensors, Jumper Wire and AC Adapter
YNL502B – 4 Lock Pack with 4 Sensors and 4 Jumper Wires
- **Accessories**
YNL502 – Single Lock
YNL503 – Magnet Wand
YNL504 – Jumper Wire
YNL505 – Sensor
YNL507 – AC Adapter

DIAGRAM

DIAGRAMS ARE NOT TO SCALE. MEASUREMENTS ARE IN MILLIMETERS (MM).

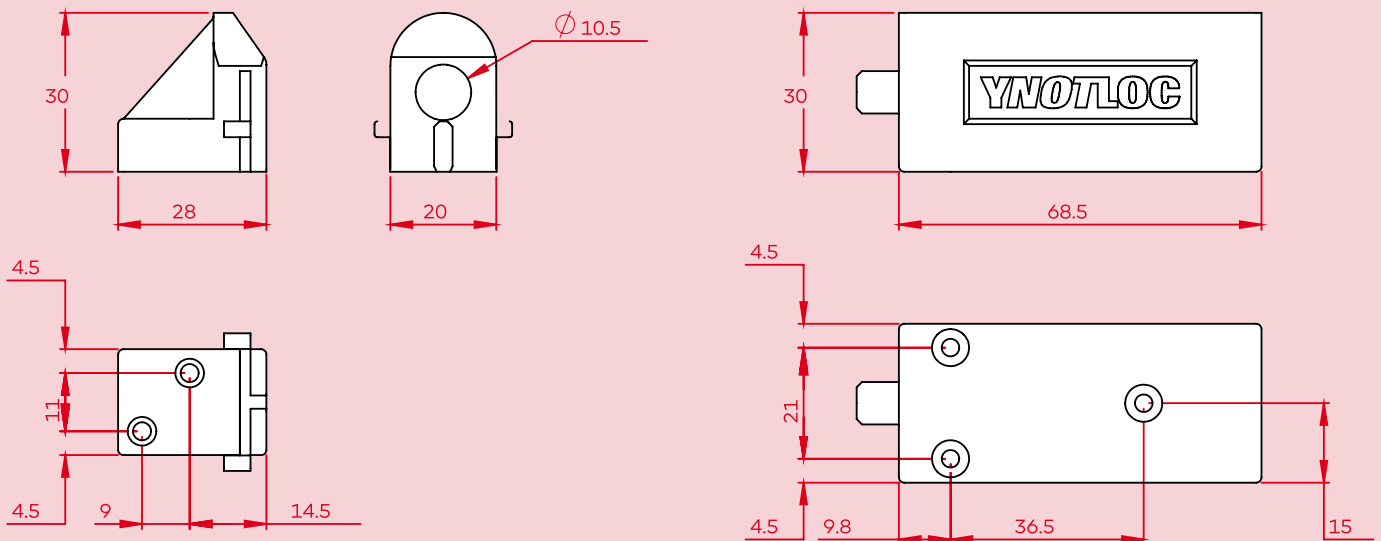

CONTACT SALES@BQTSOLUTIONS.COM TO BE PUT IN TOUCH WITH YOUR LOCAL REPRESENTATIVE.

WWW.BQTSOLUTIONS.COM